

## PERFORMANCE

°F   %RH	<b>80   60</b>	<b>75   50</b>
Water Removal (P/Day)	105	70
Efficiency (P/kWh)	7.5	6.0
Energy Factor (L/kWh)	3.5	2.8

## ELECTRICAL


°F   %RH	<b>80   60</b>
Supply Voltage	110-120V
Current Draw	5.0A - 1 phase
MCA*	15A
MOP*	15A
Recommended Breaker Size	15A
Power	540W
Power Cord	10', NEMA 5-15P
CFM	280
BTU (Total)	6,800
BTU (Motor Load)	2,000
BTU (Heat of Condensation)	4,800

## SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R454b
Refrigerant Amount	1 lb 2 oz
Weight	60 lb
Air Filter MERV Rating	MERV-13
Dimensions	12" x 14" x 1"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	55 F Min - 95 F Max



## DIMENSIONS

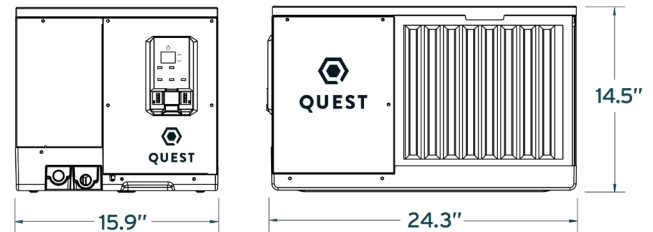

## FEATURES

- + **Patented M-CoRR™ Technology:** achieves highest efficiency available in its class
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as mold, bacteria, and virus carriers
- + **Onboard Digital Controls:** user-friendly digital display for precise setpoints
- + **Low Amp Draw:** freeing up electricity for other equipment on the electrical panel
- + **Auto-Restart:** resets to previous settings after loss of power

Specifications are subject to change without notice. Drawings are not to scale.