


## PERFORMANCE

°F   %RH	80   60	75   50
Water Removal (P/Day)	155	90
Efficiency (P/kWh)	8.5	5.6
Energy Factor (L/kWh)	4.0	2.6

## ELECTRICAL


°F   %RH	80   60
Supply Voltage	110-120V
Current Draw	6.9A - 1 phase
MCA*	15A
MOP*	15A
Recommended Breaker Size	15A
Power	750W
Power Cord Plug Type:	9' 14/3, SJTW, 120V NEMA 5-15P 
CFM	500
BTU (Total)	9,700
BTU (Motor Load)	2,600
BTU (Heat of Condensation)	7,100

## SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R454B
Refrigerant Amount	3 lb
Weight	130 lb
Air Filter MERV Rating	MERV-13
Dimensions	18" x 18" x 2"
Drain Port Connection	3/4 Threaded NPT
Operating Temperature	56 F Min - 95 F Max



## DIMENSIONS

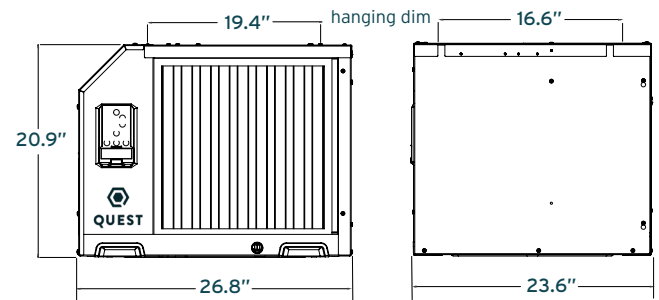

## FEATURES

- + **Patented M-CoRR™ Technology:** proprietary multi-coil design achieves highest efficiencies available in the market
- + **Digital Onboard Control:** easy operation of your machine, with optional external control
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as pollen, mold, bacteria, and some viruses
- + **Integrated Lift and Hang Points:** allow for easy movement and flexible installation
- + **Easy Access Panel:** removable panel for easier in-place maintenance and serviceability

Specifications are subject to change without notice. Drawings are not to scale. \*See manual for details on MCA/MOP.